


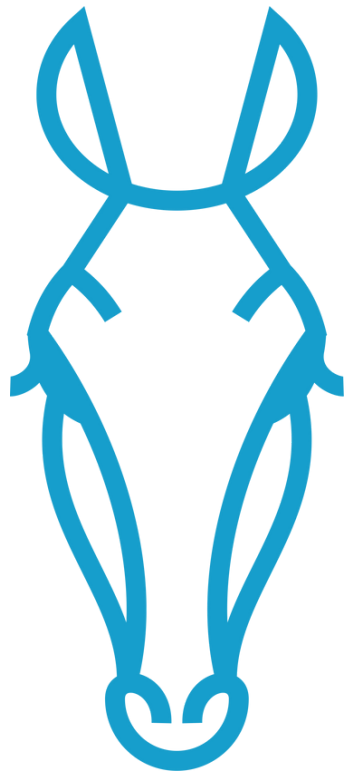

Linkstyle

Tocabot Smart
Switch Button Pusher
Manual


If you need any support, don't hesitate to
reach out to us at:

email: support@linkstyle.life

voicemail: 1-888-419-4888

What's in the box


- 1 x Tocabot Smart Switch Button Pusher
- 1 x Long Straight Arm
- 1 x Short Straight Arm
- 1 x Ring Arm
- 6 x Mounting Adhesive

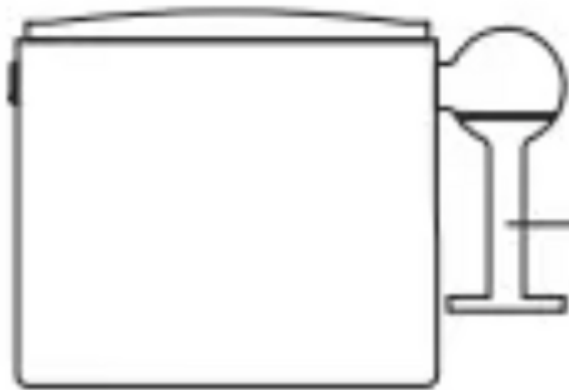

Replaceable Arm

Replaceable
Short Arm &
Ring Arm

ON ↔ OFF

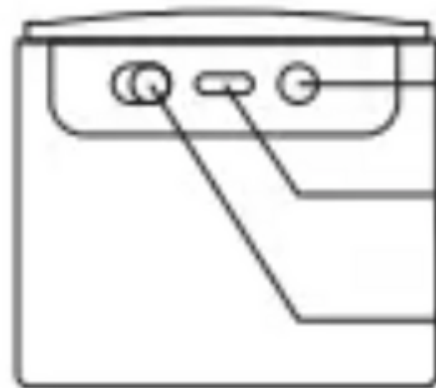

LED Indicator

Charging Port

ON/OFF Switch



Smart Functions

Install the Linkstyle app

Scan the QR code below to download and install the Linkstyle app. Register a new account on the app if you do not have one.



*Alternatively, you can also search for “Linkstyle” on the Apple App Store or Google Play Store to find the app.

***Important Note:

When registering an account in the Linkstyle app, be sure to set the region to United States of America.



Register

United States of America



Email Address

☐ I Agree [Privacy Policy](#) and [User Agreement](#)

Get Verification Code

Adding the Tocabot to the Linkstyle app

The Tocabot Smart Switch Button Pusher is a Bluetooth device that can connect to the Linkstyle app either to a 2.4GHz Wi-Fi network through a Bluetooth hub or directly to your phone via Bluetooth.

Wi-Fi

Connecting the Tocabot to a 2.4GHz Wi-Fi network enables you to control it from anywhere that has internet access. See Page 7 for setup.

Bluetooth

Connecting the Tocabot to your phone directly gives you access and control using Bluetooth in short range. See Page 13 for setup.

Add the device to app - Wi-Fi

Step 1: Set up gateway in Linkstyle app

Before setting up this device, be sure to have a Bluetooth hub added to the Linkstyle mobile app. You can use the [Nexohub Smart Multi-Mode Gateway](#) for this purpose. Please refer to the user manual for the gateway if it is not yet set up.


Step 2: Charge the Tocabot

Plug the Tocabot into a USB charger (not included) with the included USB-C cable to charge it. The device is able to function normally while it charges, but we recommend charging the device for 2 hours before setting it up for the first time.

Step 3: Put device in setup mode

Turn the device on-off-on-off-on by toggling the ON/OFF switch until the LED indicator flashes purple

ON ↔ OFF

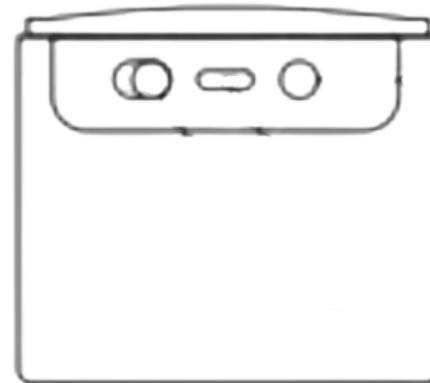

Step 4: Add device to app through gateway

Note: Keep the gateway and the Tocabot within close proximity during setup. You can relocate the device elsewhere within range for regular use after setup.



In the Linkstyle mobile app, navigate to the “Devices” tab, then tap the corresponding gateway to bring up the gateway page.

Setup with the Nexohub


In the gateway page of the Linkstyle app, select the "Bluetooth devices list" tab, then tap the "Add devices" button on the bottom of the screen. From the pop-up menu, tap "Add new devices".

The app will now search for nearby devices. Once a Tocabot icon shows up in the app, tap the "Done" button.



You can optionally rename the device in the app on the next page. Tap the "Done" button to complete setup.

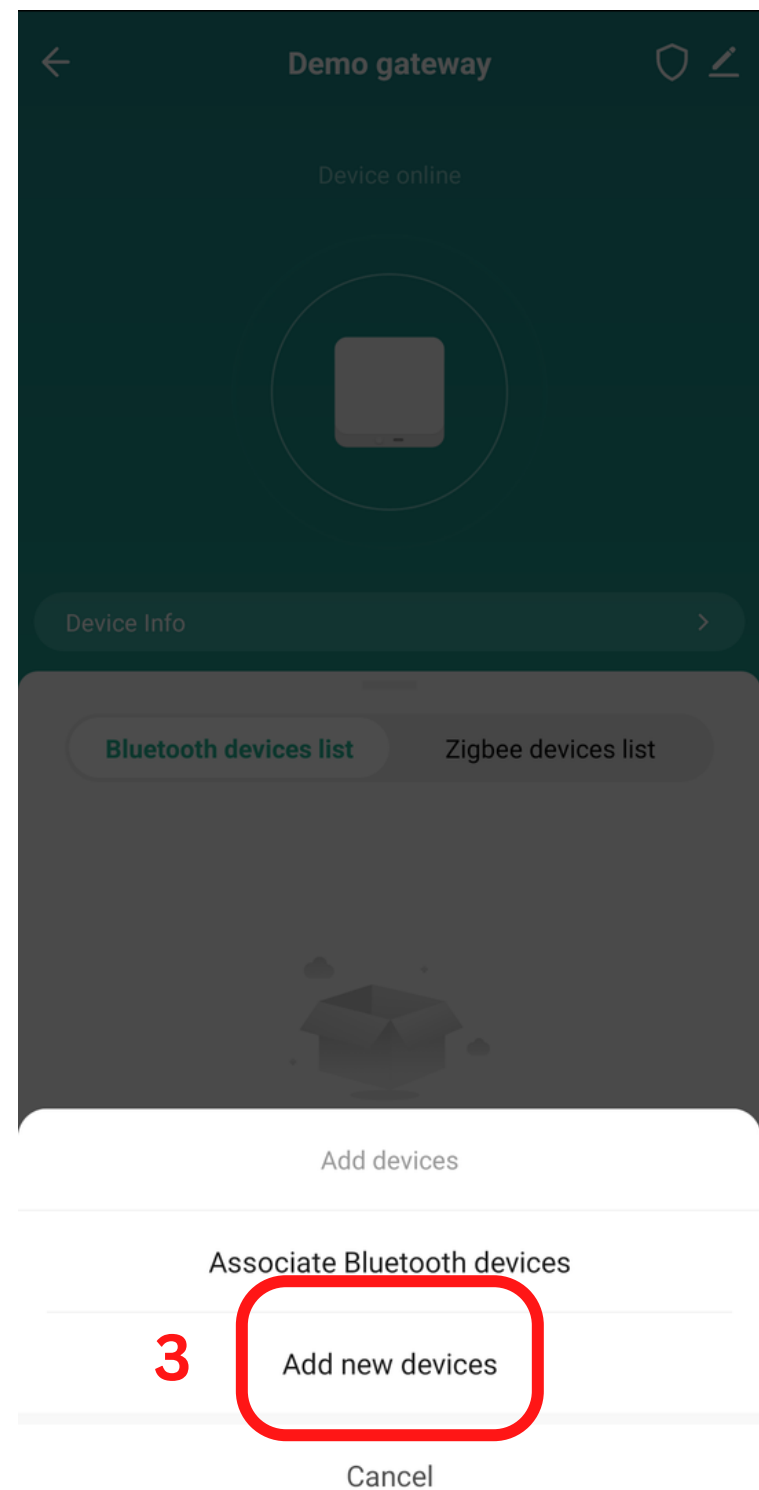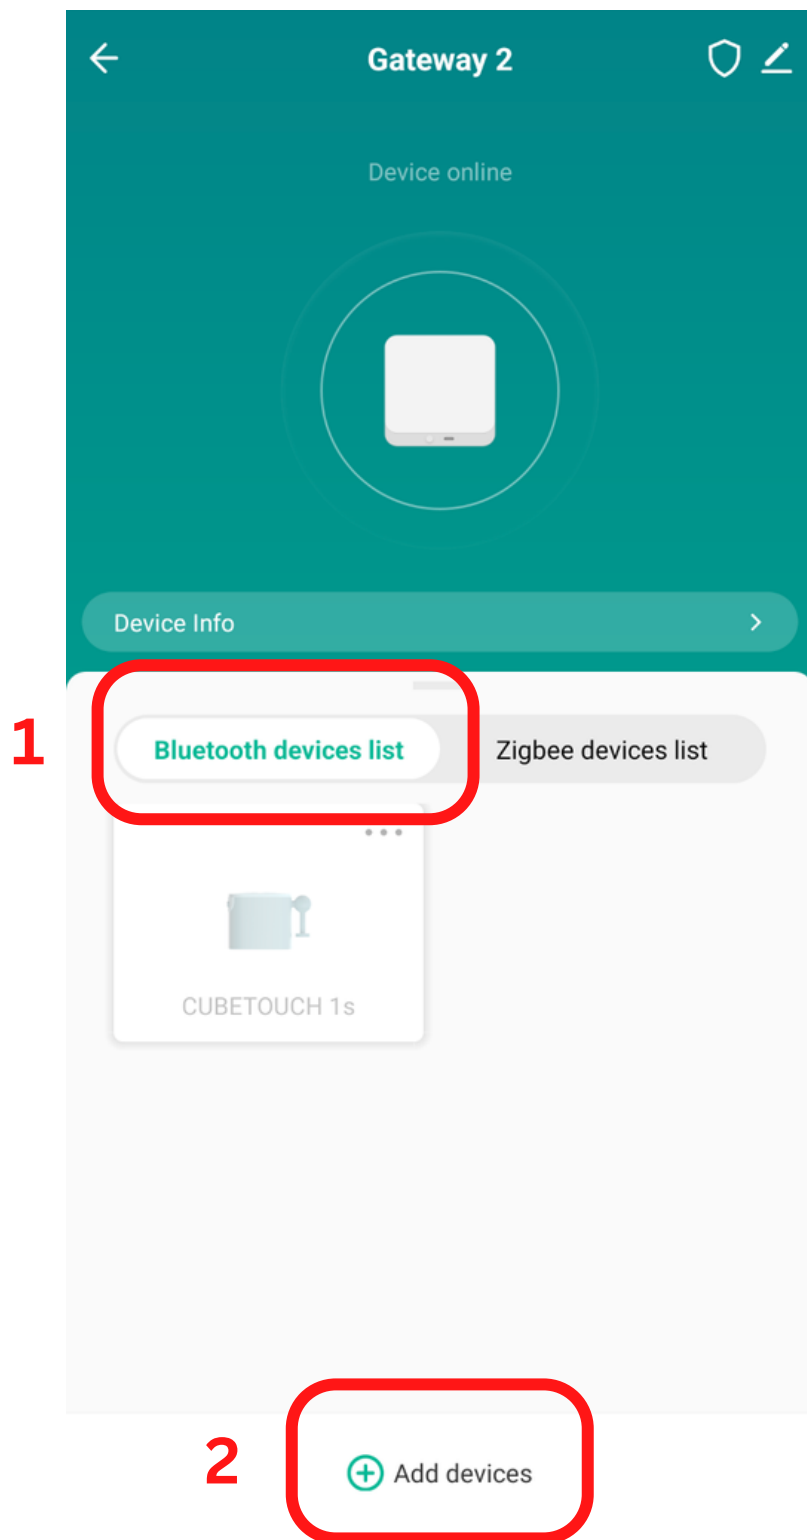


Select the Bluetooth tab
and tap "Add devices"

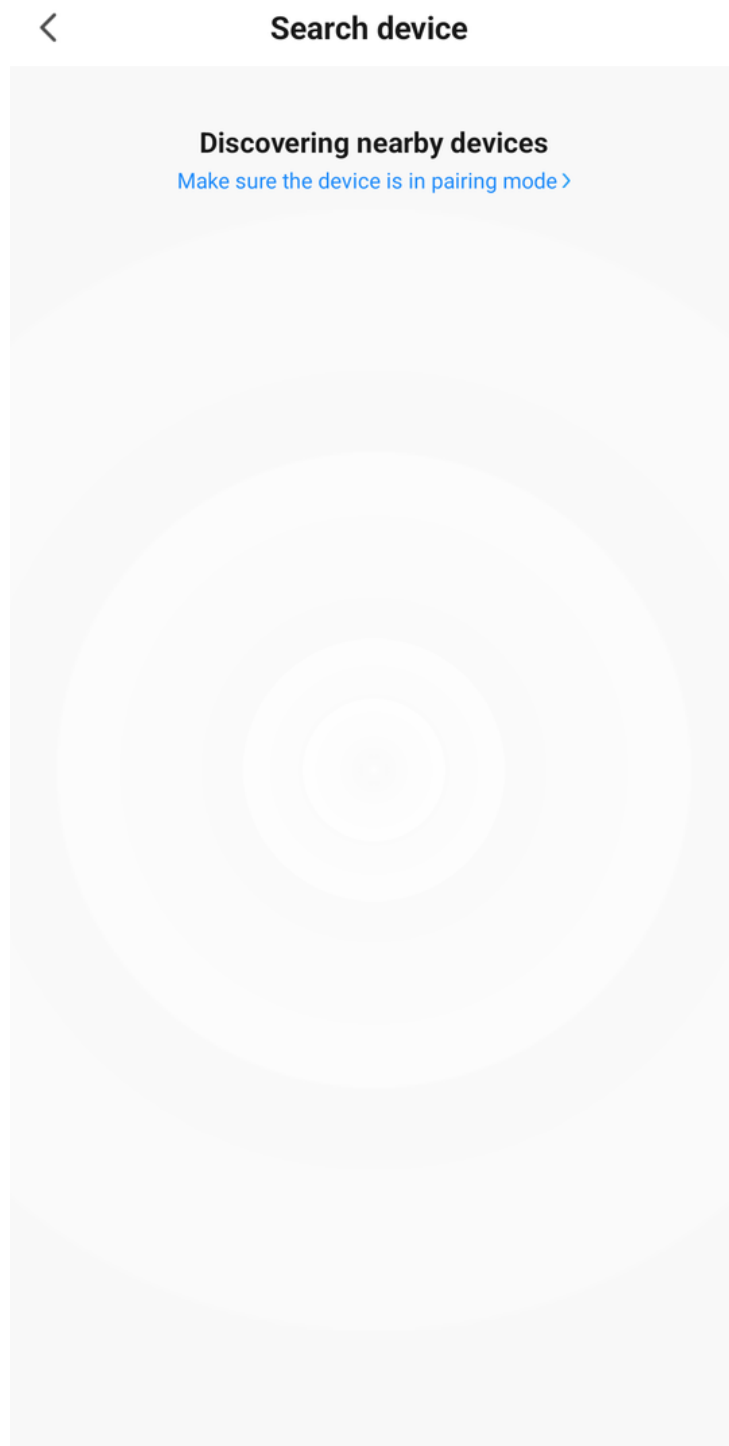


The app automatically searches for Bluetooth devices in setup mode

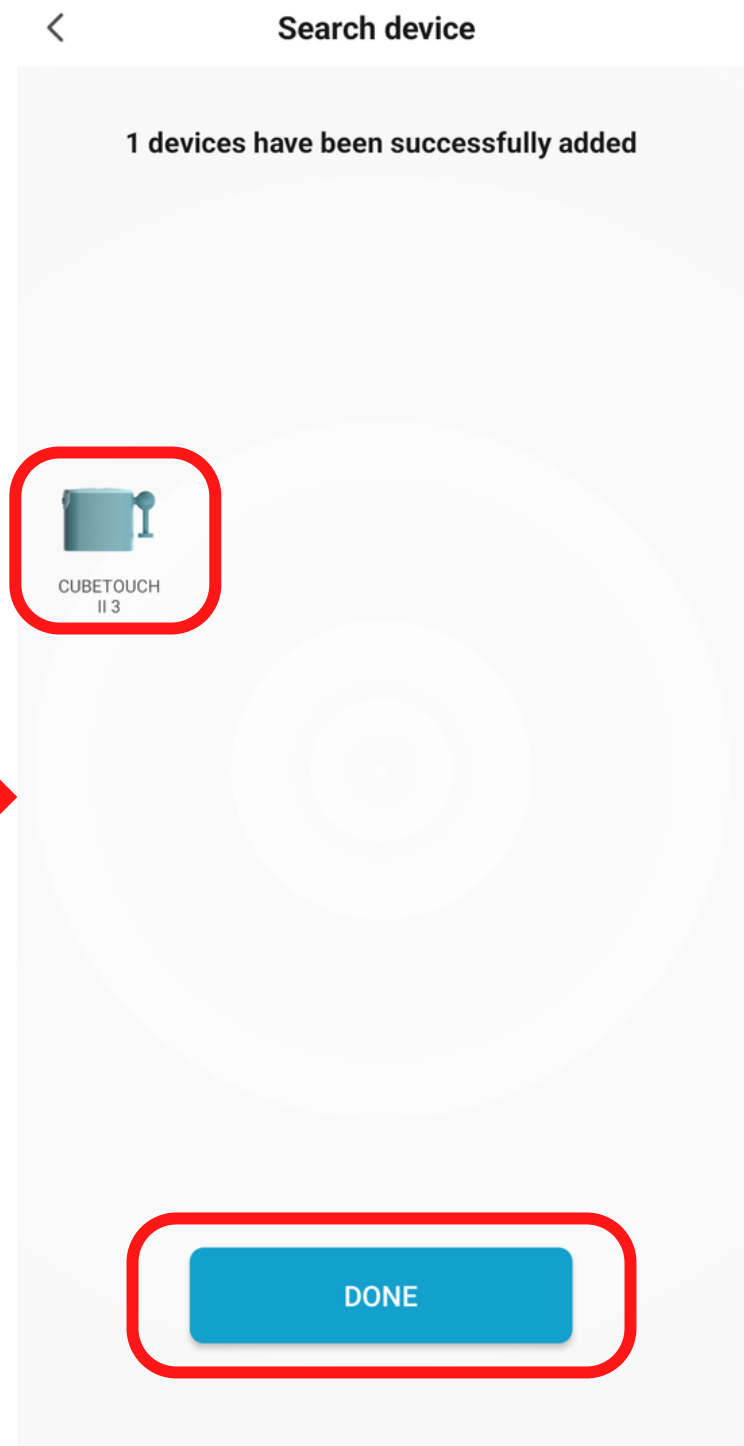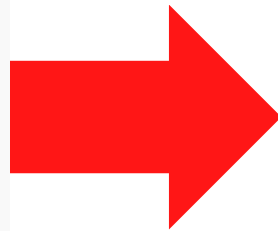

Tap "DONE" when the Tocabot is discovered

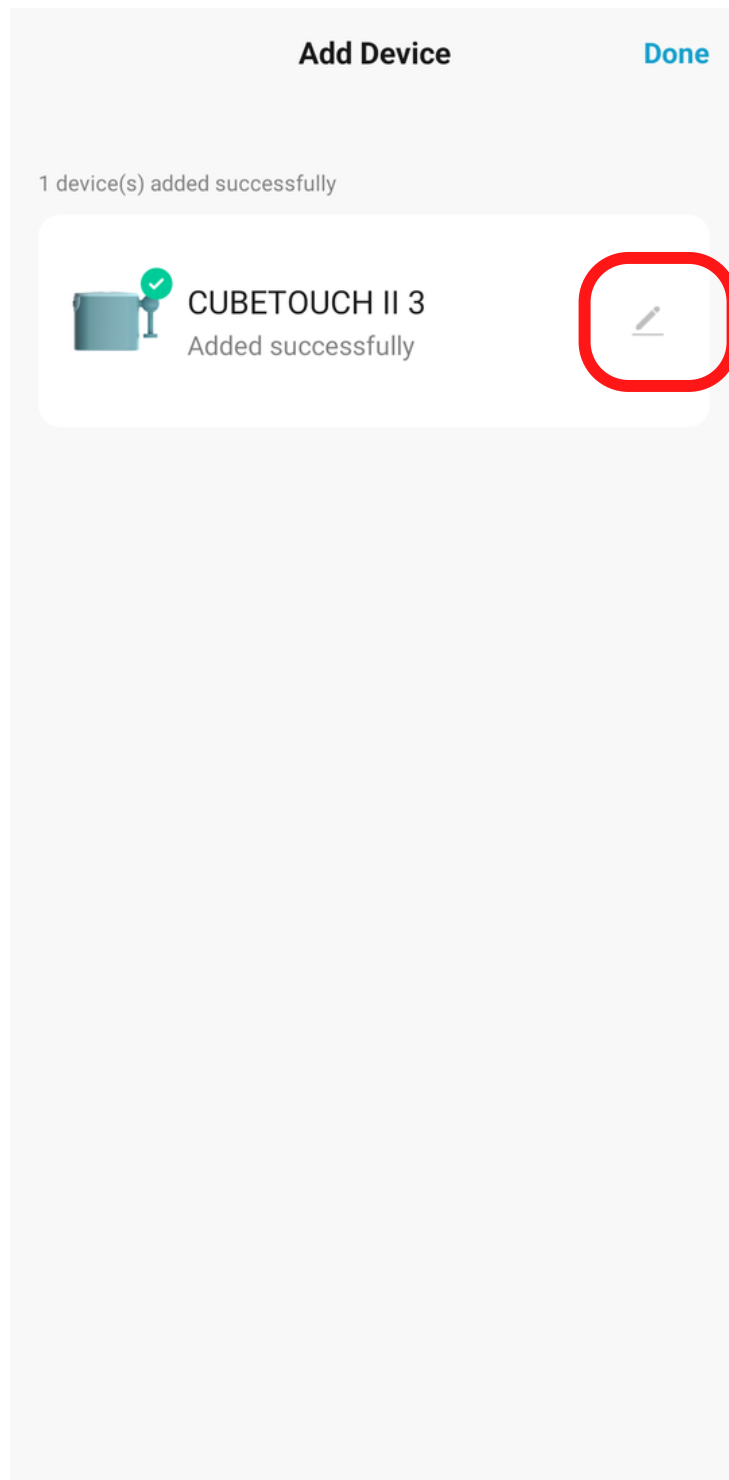

You can give the device a custom name and/or assign it to a room if desired

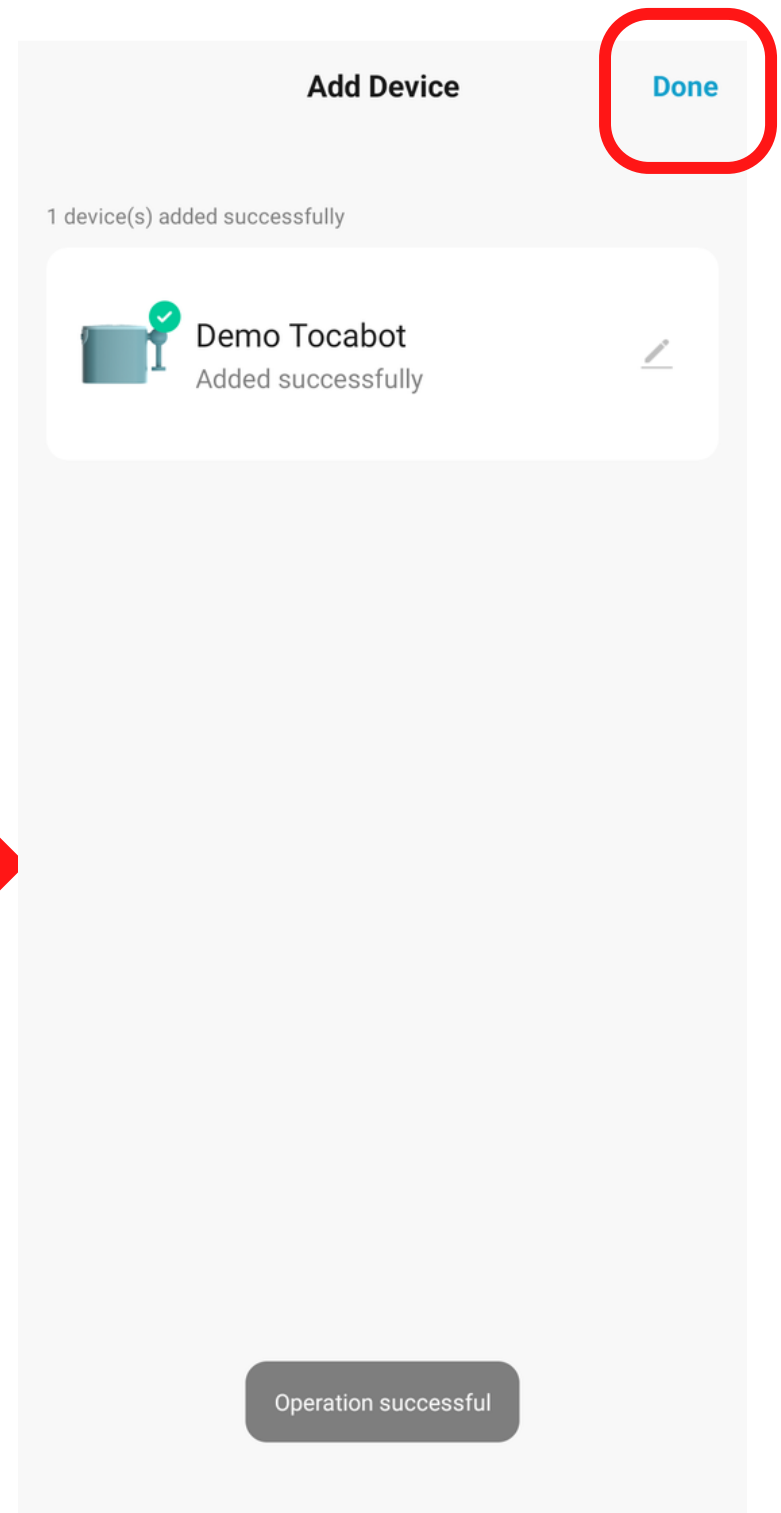

Tap "Done" when ready

Add the device to app - Bluetooth


Step 1: Charge the Tocabot

Plug the Tocabot into a USB charger (not included) with the included USB-C cable to charge it. The device is able to function normally while it charges, but we recommend charging the device for 2 hours before setting it up for the first time.

Step 2: Put device in setup mode

Turn the device on-off-on-off-on by toggling the ON/OFF switch until the LED indicator flashes purple

ON ↔ OFF

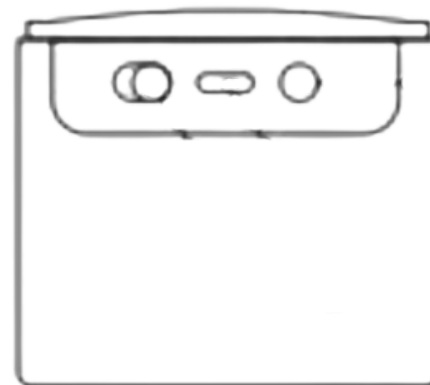

Step 3: Add device to app

1. Log into the Linkstyle app and go to the Devices page.
2. Tap the "+" button, then tap "Add Device"
3. The app will automatically scan for new devices to add.
4. Once the device is discovered, an icon will appear to represent the Tocabot device.
5. Tap on the Tocabot device icon and follow the on-screen instructions to complete setup.

Product Specifications

Maximum Movement: 0.31 in (8mm)

Stall Torque: 1.6 kgf-cm

Dimensions: 1.89 x 1.46 x 1.30 inches (48 x 37x 33 mm)

Wireless Protocol: BLE 4.2

Battery Capacity: 500 mAh

Charging Port: USB Type-C

Working Temperature: 14 °F to 113°F (-10 °C to 45 °C)

LED Indicator

Green = Charged

Red = Bluetooth/Pairing Error (Need to reset)

Blue-to-Purple Flashing = Pairing Mode Enabled

Apple and Apple logos are trademarks of Apple, Inc., registered in the U.S. and other countries. App Store is a service mark of Apple, Inc.

Amazon, Alexa, and all related logos are trademarks of Amazon.com Inc. or its affiliates.

Google and Google Play are trademarks of Google LLC. Other third-party brands and names are the property of their respective owners.

Linkstyle.life

Unlocking the enchanted life!